



**Telemark™  
Solutions**

**THE BEST WAY TO MARK  
AND LOCATE  
SERVICE TEE'S & PLASTIC PIPE**

**DISKMARK™ 3000 - GAS**



**10 Inches Diameter  
10 Feet Locating Range**




**Pinpoint and Protect  
Your Buried Facilities**

**LOCATE SERVICE TEE'S WITHOUT RISKING DAMAGE TO BURIED FACILITIES  
The DISKMARK™ 3000 "The Best Way to Mark and Locate Service Tee's"**

<b>Applications</b>	<b>Advantages</b>	<b>Benefits</b>
<ul style="list-style-type: none"> <li>• Valves</li> <li>• Service Tee's</li> <li>• Service Stubs</li> <li>• Pipe Repair Points</li> <li>• Electrofusion Joints</li> <li>• Squeeze Points</li> <li>• Plastic Pipes</li> </ul>	<ul style="list-style-type: none"> <li>• 10 Foot Range</li> <li>• Pinpoint Pipe, Valves &amp; Fittings</li> <li>• Works with any Marker Locator</li> <li>• Ignores Metal Conduit &amp; AC Power</li> <li>• Uses Gas Utility Frequency</li> </ul>	<ul style="list-style-type: none"> <li>• Deepest Marker</li> <li>• Easy to Use</li> <li>• Reduces Risk of Costly Damage</li> <li>• Saves Time and MONEY</li> <li>• Eliminates, Stakes &amp; Flags</li> </ul>

# DISKMARK™ 3000 - GAS

**THE BEST WAY TO MARK AND LOCATE BURIED FACILITIES**

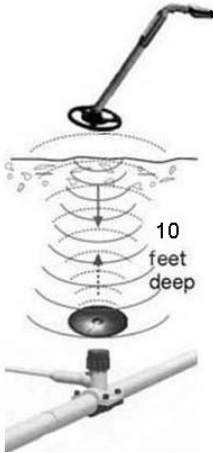

### Operating Principle:

- Marker Locator\* sends signal and listens for signal return
- Marker receives signal and returns it to locator
- Signal strength increases as locator gets nearer to buried marker
- Marker Range: 10 Feet

\*Works with any Electronic Marker Locator made by 3M™, Metrotech™, Tempo™, Dynatel™, EMSII and Rycom™

## GPS + GIS

Provides up-to-date facilities asset management when used in conjunction with hand held GPS and GIS mapping database.

X,Y,Z PinPoint Field Locating 2" accuracy is easily achieved with low cost GPS and electronic marker locators.

## EASY TO USE

- Place:** Place Diskmark 3000 six inches above buried facility  
Back fill to grade
- Locate:** Identify Diskmark 3000 location with marker locator
- Excavate:** Excavate to Diskmark 3000 and remove
- Reenter:** Hand dig to buried facility
- Backfill:** Replace Diskmark 3000 for future use

## PRODUCT SPECIFICATIONS

<b>Product Name</b>	Diskmark 3000	<b>Depth Range</b>	10 feet
<b>Model Number</b>	DM-3000	<b>Frequency</b>	83.0 kHz
<b>Size</b>	10" dia. x 1" height	<b>Operating Temp</b>	-30° to 167° F
<b>Weight</b>	.6 lbs.	<b>Storage Temp</b>	-40° to 167° F
<b>Packaging:</b>	24 units / case	<b>Color Code</b>	Yellow

Important notice to purchasers: All statements, technical information and recommendations contained herein are based on information we believe to be reliable, but the accuracy and completeness thereof is not guaranteed. The following is made in lieu of all warranties, expressed or implied: Telemark Solutions™ Inc.'s obligation shall be to repair or replace any Telemark product proven to be defective within one year after shipment. Neither seller nor manufacturer shall be liable for injury, loss or damage, direct or consequential, arising out of the use of this product. User shall determine suitability of product for his intended use. User assumes all risk and liability in the use of the product. No statement or recommendation contained herein shall have any force or effect unless in an agreement signed by officers of Telemark Solutions™ Inc. Telemark and DiskMark are trademarks of Telemark Solutions™ Inc. Patents pending.

092008

**Telemark Solutions™**  
**302 Wright Drive**  
**Georgetown, Texas 78628**  
**Ph / Fax: 512-869-8855**  
**Email: [Telemark@texas.net](mailto:Telemark@texas.net)**  
**[www.telemarksolutions.com](http://www.telemarksolutions.com)**