




**Telemark™
Solutions**

**THE BEST WAY TO MARK
AND RE-LOCATE BURIED SPLICES**

DISKMARK™ 1000 - POWER

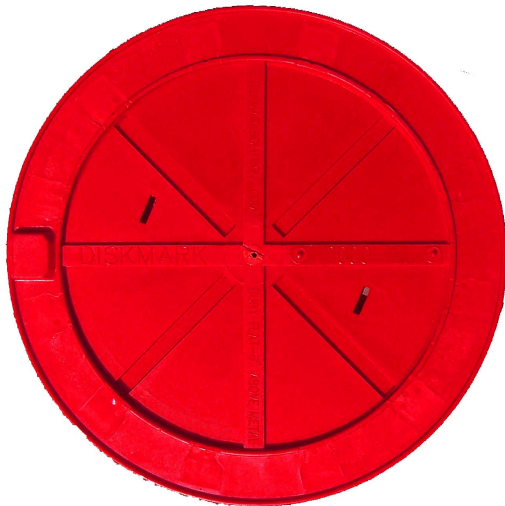

**10 Inches Diameter
10 Feet Locating Range**




Pinpoint and Protect Your Buried Facilities

LOCATE SPLICES WITHOUT RISKING DAMAGE TO BURIED FACILITIES
The DISKMARK™ 1000 “The Best Way to Mark and Re-Locate Buried Splices”

Applications	Advantages	Benefits
<ul style="list-style-type: none"> • Buried Splices • Service Drops • Conduit Stubs • Hand Holes / Boxes • Cable Repair Points • HV Cable Path 	<ul style="list-style-type: none"> • 10 Foot Range • Pinpoint Cable Splices • Works with any Marker Locator • Ignores Metal Conduit & AC Power • Uses Power Utility Frequency 	<ul style="list-style-type: none"> • Deepest Marker • Easy to Use • Pinpoints Buried Splices • Reduces Risk of Costly Plant Damage • Saves Time and MONEY

DISKMARK™ 1000 — Power

THE BEST WAY TO MARK AND RE-LOCATE BURIED FACILITIES

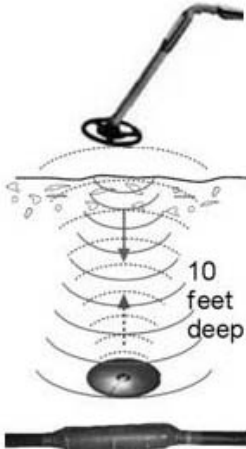

Operating Principle:

- Transmitter sends signal and listens for signal return
- Marker receives signal and returns it to locator
- Signal strength increases as locator gets nearer to buried marker
- Marker Range: 10 Feet

Works with any Electronic Marker Locator made by 3M™, Metrotech™, Tempo™, Dynatel™, EMSII & Rycom™

GPS + GIS

Provides up-to-date facilities asset management when used in conjunction with hand held GPS and GIS mapping database.

X,Y,Z PinPoint Field Locating 2" accuracy is easily achieved with low cost GPS and electronic marker locators.

EASY TO USE

- Place:** Place Diskmark 1000 one foot above buried facility (cable tie optional)
Back fill to grade
- Locate:** Identify Diskmark 1000 location with marker locator
- Excavate:** Excavate to Diskmark 1000 and remove
- Reenter:** Hand dig to buried facility
- Backfill:** Replace Diskmark 1000 for future use

PRODUCT SPECIFICATIONS

Product Name	Diskmark 1000	Depth Range	10 feet
Model Number	DM-1000	Frequency	169.8 kHz
Size	10" dia. x 1" height	Operating Temp	-30° to 167° F
Weight	.6 lbs.	Storage Temp	-40° to 167° F
Packaging:	24 units / case	Color Code	Red

Important notice to purchasers: All statements, technical information and recommendations contained herein are based on information we believe to be reliable, but the accuracy and completeness thereof is not guaranteed. The following is made in lieu of all warranties, expressed or implied: Telemark Solutions™ Inc.'s obligation shall be to repair or replace any Telemark product proven to be defective within one year after shipment. Neither seller nor manufacturer shall be liable for injury, loss or damage, direct or consequential, arising out of the use of this product. User shall determine suitability of product for his intended use. User assumes all risk and liability in the use of the product. No statement or recommendation contained herein shall have any force or effect unless in an agreement signed by officers of Telemark Solutions™ Inc. Telemark and Diskmark are trademarks of Telemark Solutions™ Inc. Patents pending.

092008

Telemark Solutions™
302 Wright Drive
Georgetown, Texas 78628
Ph / Fax: 512-869-8855
Email: Telemark@texas.net
www.telemarksolutions.com