




**Telemark™
Solutions**

**THE BEST WAY TO MARK
AND LOCATE SEWER LINES,
SEWER TAPS, SERVICE TEE'S,
SERVICE WYE'S & PLASTIC PIPE**

DISKMARK™ 5000 - SANITARY



**10 Inch Diameter
10 Feet Locating Range**

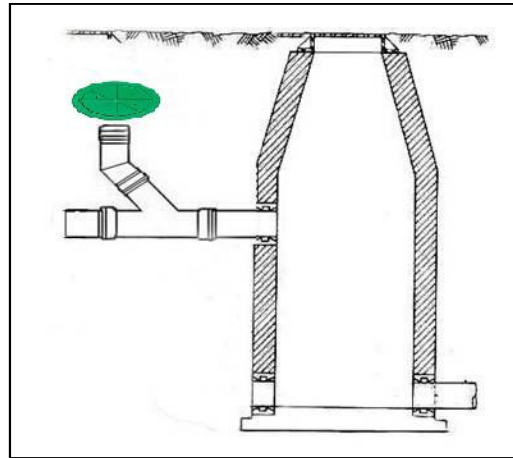

Mark and Locate Your Buried Facility

LOCATE SERVICE TEE'S WITHOUT RISKING DAMAGE TO BURIED FACILITIES


The DISKMARK™ 5000

“The Best Way to Mark and Locate Service Tee's & Sewer Taps”

Marker Locator Applications	Marker Locator Features	Utility Benefits
<ul style="list-style-type: none"> • Sewer Taps • Service Wye's • Service Stubs • Pipe Repair Points • Pipe Ends • Plastic Pipe 	<ul style="list-style-type: none"> • 10 Foot Range • Pinpoint Pipe & Fittings • Works with any Marker Locator • Ignores Metal Conduit & AC Power • Uses Sanitary Utility Frequency 	<ul style="list-style-type: none"> • Long Range Deepest Marker • Easy to Use • Reduces Risk of Costly Damage • Saves Time and MONEY • Eliminates, Stakes & Flags

DISKMARK™ 5000 - SANITARY

THE BEST WAY TO MARK AND LOCATE PLASTIC PIPE, PIPE STUBS & SERVICE WYES

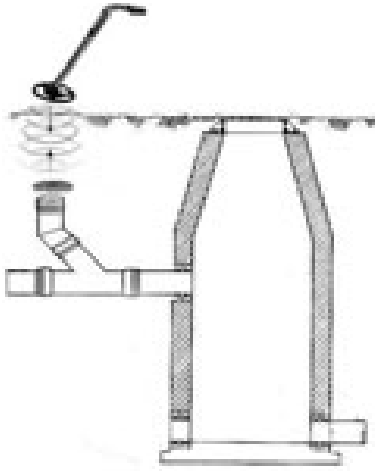

Operating Principle:

- Marker Locator* sends signal and listens for signal return
- Marker receives signal and returns it to locator
- Signal strength increases as locator gets nearer to buried marker
- Marker Range: 10 Feet

*Works with any Marker Locator made by 3M™, Metrotech™, Tempo™, Dynatel™, EMSII and Rycom™

GPS + GIS

Provides up-to-date facilities asset management when used in conjunction with hand held GPS and GIS mapping database.

X,Y,Z PinPoint Field Locating 2" accuracy is easily achieved with low cost GPS and electronic marker locators.

EASY TO USE

- Place:** Place Diskmark 5000 six inches above pipe, valve or stub
Back fill to grade
- Locate:** Identify Diskmark 5000 location with marker locator
- Excavate:** Excavate to Diskmark 5000 and remove
- Reenter:** Hand dig to buried facility
- Backfill:** Replace Diskmark 5000 for future use

PRODUCT SPECIFICATIONS

Product Name	Diskmark 5000	Depth Range	10 feet
Model Number	DM-5000	Sanitary Frequency	121.6 kHz
Size	10" dia. x 1" height	Operating Temp	-30° to 167° F
Weight	.6 lbs.	Storage Temp	-40° to 167° F
Packaging:	24 units / case	Color Code	Green

Important notice to purchasers: All statements, technical information and recommendations contained herein are based on information we believe to be reliable, but the accuracy and completeness thereof is not guaranteed. The following is made in lieu of all warranties, expressed or implied: Telemark Solutions™ Inc.'s obligation shall be to repair or replace any Telemark product proven to be defective within one year after shipment. Neither seller nor manufacturer shall be liable for injury, loss or damage, direct or consequential, arising out of the use of this product. User shall determine suitability of product for his intended use. User assumes all risk and liability in the use of the product. No statement or recommendation contained herein shall have any force or effect unless in an agreement signed by officers of Telemark Solutions™ Inc. Telemark and Diskmark are trademarks of Telemark Solutions™ Inc. Patented and other patents pending.

Telemark Solutions™
302 Wright Drive
Georgetown, Texas 78628
Ph / Fax: 512-869-8855
Email: Telemark@texas.net
www.telemarksolutions.com